



## SM 800 - series


### 800 watt DC POWER SUPPLY

**SM 7.5-80**      0 - 7.5 V   0 - 80 A  
**SM 18-50**      0 - 18 V   0 - 50 A

#### Autoranging

**SM 70-AR-24**    0 - 35 V   0 - 24 A  
                          0 - 70 V   0 - 12 A

**SM 400-AR-4**    0 - 200 V   0 - 4 A  
                          0 - 400 V   0 - 2 A

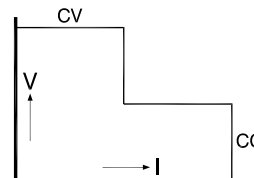

- Efficiency up to 89 %.
- Weight only 5.4 kg
- Wide input voltage range: 90 - 265 V AC, 48-62 Hz
- Active Power Factor Correction, PF=0.99
- 100 kHz MOSFET power conversion technique
- 0 - 5 V analog programmable (on both voltage and current)
- Isolated analog programming with optional ISO AMP CARD, to prevent earth loops
- **Ethernet, CAN/PROFI-Bus, IEEE488** or **RS232** programming with optional interface cards
- Very low HF-emission, OK for **light** industrial environment, immunity OK for **industrial** environment

- Very low output ripple and spikes
- Very stable output voltage or current ( $6 \cdot 10^{-5}$  -  $10^{-4}$ )
- Excellent dynamic response to load changes
- Master / Slave parallel and series operation with equal current and voltage sharing
- Designed for long life at full power
- Protected against all overload and short circuit conditions
- V and I control with 10-turn potentiometers, resolution 0.03 %. Optional with digital encoders
- Silent blower, only runs when needed, variable speed
- 48 hours burn-in

	SM 7.5-80	SM 18-50	SM 70-AR-24	SM 400-AR-4
<b>Output</b> voltage current  AUTORANGING (2 ranges) max. output current / voltage	0 - 7.5 V 0 - 80 A  no -	0 - 18 V 0 - 50 A  no -	0 - 70 V 0 - 24 A  yes 24 A / 0-35 V 12 A / 35-70 V	0 - 400 V 0 - 4 A  yes 4 A / 0-200 V 2 A / 200-400 V
<b>Input</b> <b>AC</b> single phase, 48 - 62 Hz  <i>Power Derating vs input:</i> 90 V : P <sub>out max</sub> (W), I <sub>in</sub> (A) 100 V : P <sub>out max</sub> (W), I <sub>in</sub> (A) 110 V : P <sub>out max</sub> (W), I <sub>in</sub> (A)  <b>230 V : P<sub>out max</sub> (W), I<sub>in</sub> (A)</b>  power factor, 100%, 50% load  internal fuses standby input power (V <sub>o</sub> =I <sub>o</sub> =0) standby input power (V <sub>o</sub> =V <sub>max</sub> )	90 - 265 V  580, 8.5 600, 7.6 600, 6.9  600, 3.2  0.99, 0.96  12.5 AT 14 W 18 W	90 - 265 V  Vo =16 V   Vo =18 V 725, 10   670, 9.2 800, 9.9   730, 8.9 800, 8.8   770, 8.4  800, 4.1   900, 4.5  0.99, 0.98  12.5 AT 14 W 18 W	90 - 265 V  740, 10 830, 10 840, 9  840, 4.2  0.99, 0.98  12.5 AT 14 W 20 W	90 - 265 V  750, 10 800, 9.5 800, 8.5  800, 4  0.99, 0.98  12.5 AT 14 W 26 W
			35 V / 70 V	200 V / 400 V
<b>Efficiency</b> AC 230 V input, full load AC 115 V input, max. load	82 % 80 %	87 % 83 %	89 % 85 %	89 % 86 %
<b>Regulation</b>				
Load 0 - 100% <b>CV</b> Line 120 - 265 V AC <b>CV</b> (measured on sense block)	0.2 mV 0.2 mV	0.5 mV 0.2 mV	2 mV 0.5 mV	10 mV 2 mV
Load 0 - 100% <b>CC</b> Line 120 - 265 V AC <b>CC</b> (internal voltage sense)	4 mA 1 mA	3 mA 1 mA	1.5 mA 1 mA	0.5 mA 0.2 mA
<b>Ripple + noise</b> rms (BW=300 kHz) <b>CV</b> p-p (BW=50 MHz) <b>CV</b>  rms (BW=300 kHz) <b>CC</b> p-p (BW=50 MHz) <b>CC</b> CC-ripple at full load	2.5 mV 10 mV  25 mA 120 mA	2 mV 8 mV  5 mA 25 mA	3 mV 15 mV  3 / 1 mA 15 / 5 mA	15 mV 80 mV  0.8 / 0.5 mA 3 / 1.5 mA
<b>Front panel connection</b>	<i>Not available</i>	<i>Option 257</i>	<i>Option 258</i>	<i>Option 259</i>
Load Regulation: Load 0 - 100% <b>CV</b> Ripple + noise rms (BW=300 kHz) <b>CV</b> p-p (BW=50 MHz) <b>CV</b>	- - -	15 mV 3 mV 18 mV	40 mV 4 mV 20 mV	15 mV 18 mV 150 mV
<b>Temp. coeff., per °C</b> <b>CV</b> <b>CC</b>			35.10 <sup>-6</sup> 60.10 <sup>-6</sup>	
<b>Stability</b> after 1 hr warm-up during 8 hrs <b>CV</b> <b>CC</b> t <sub>amb</sub> = 25 ± 1 °C, V <sub>in</sub> = 230 V AC (int. voltage sensing for CC-stab.)			6.10 <sup>-5</sup> 9.10 <sup>-5</sup>	
<b>Analog Programming</b>	<b>CV</b>		<b>CC</b>	
<b>Programming inputs</b> input range accuracy offset temp. coeff. offset input impedance	0 - 5 V ± 0.2% - 0.1 ... +1.3 mV (on 5V) 10 μV / °C > 1 MOhm		0 - 5 V ± 0.5% 0 ... +2.2 mV (on 5V) 50 μV / °C > 1 MOhm	
<b>Monitoring output</b> output range accuracy offset temp. coeff. offset output impedance	0 - 5 V ± 0.2% - 1... 0 mV (on 5V) 3 μV / °C 2 Ohm / max. 4 mA		0 - 5 V ± 0.5% - 1.1... 0 mV (on 5V) 60 μV / °C 2 Ohm / max. 4 mA	
<b>Reference voltage</b> on prog. connector V <sub>ref</sub> TC	5.114 V ± 15 mV (R <sub>o</sub> = 2 Ohm, max. 4 mA) 20 ppm			
<b>+12 V output</b> on prog. Connector V <sub>o</sub> I <sub>max</sub> R <sub>o</sub>	12 V ± 0.2 V 0.2 A 3 Ohm			

<b>Relay Outputs</b> ACF DCF	AC - Fail DC - Fail <sup>1)</sup>	both NO and NC contact both NO and NC contact	<sup>1)</sup> output voltage $\pm$ 5% beyond set point
<b>Status outputs</b> CC - status LIM - status OT - status PSOL - status ACF - status DCF - status	CC - operation CV- or CC-limit Over Temperature Power Sink Overload AC - Fail DC - Fail <sup>2)</sup>	5 V = logic 1 ( $R_o = 500 \text{ Ohm}$ ) 5 V = logic 1 ( $R_o = 500 \text{ Ohm}$ ) 5 V = logic 1 ( $R_o = 500 \text{ Ohm}$ ) 5 V = logic 1 ( $R_o = 500 \text{ Ohm}$ ) 5 V = logic 1 ( $R_o = 500 \text{ Ohm}$ ) 5 V = logic 1 ( $R_o = 500 \text{ Ohm}$ )	<sup>2)</sup> output voltage $\pm$ 5% beyond set point
<b>Remote ShutDown</b>	with + 5V, 1 mA or relay contact		
<b>Interlock</b>	contact at rear panel, see photo of rear panel on page 1-6		
<b>Indicators</b> (front panel)	Voltage meter, Ampere meter, AC-Fail, DC-Fail, Over Temperature, Power Sink Overload, Remote-ShutDown, Remote-CV, Remote-CC, Output On, CV-limit, CC-limit, CV- and CC- mode		
<b>Controls</b> (front panel)	Mains on/off switch, CV-and CC-potmeter, CV- and CC-limit-potmeter, Display-Settings button, Display-Limits button, Remote/Local button, Output On/Off button, Front panel Lock buttons.		

<b>Programming speed</b> <i>Standard Version</i>	<b>SM 7.5-80</b>	<b>SM 18-50</b>	<b>SM 70-AR-24</b>	<b>SM 400-AR-4</b>
<b>Rise time (10 - 90%)</b> output voltage step time, (100 % load) time, (10 % load)	0 $\rightarrow$ 7.5 V 6.5 ms 2.5 ms	0 $\rightarrow$ 16 V 12 ms 5 ms	0 $\rightarrow$ 35 V 6 ms 2.5 ms	0 $\rightarrow$ 200 V 4 ms 2 ms
output voltage step time, (100 % load) time, (10 % load)	- - -	- - -	0 $\rightarrow$ 70 V 10 ms 7 ms	0 $\rightarrow$ 400 V 8 ms 5 ms
<b>Fall time (90 - 10%)</b> output voltage step time, (100 % load) time, (10 % load)	7.5 $\rightarrow$ 0 V 6.5 ms 62 ms	16 $\rightarrow$ 0 V 12 ms 120 ms	35 $\rightarrow$ 0 V 6 ms 60 ms	200 $\rightarrow$ 0 V 4 ms 42 ms
output voltage step time, (100 % load) time, (10 % load)	- - -	- - -	70 $\rightarrow$ 0 V 25 ms 250 ms	400 $\rightarrow$ 0 V 15 ms 155 ms
<b>Programming speed</b> <i>High speed Version</i>	<b>SM 7.5-80</b> <i>Option P250</i>	<b>SM 18-50</b> <i>Option P251</i>	<b>SM 70-AR-24</b> <i>Option P252</i>	<b>SM 400-AR-4</b> <i>Option P253</i>
<b>Rise time (10 - 90%)</b> output voltage step time, (100 % load) time, (10 % load)	0 $\rightarrow$ 7.5 V 0.2 ms 0.2 ms	0 $\rightarrow$ 16 V 0.22 ms 0.26 ms	0 $\rightarrow$ 35 V 0.24 ms 0.24 ms	0 $\rightarrow$ 200 V 0.4 ms 0.3 ms
output voltage step time, (100 % load) time, (10 % load)	- - -	- - -	0 $\rightarrow$ 70 V 0.24 ms 0.24 ms	0 $\rightarrow$ 400 V 0.82 ms 0.55 ms
<b>Fall time (90 - 10%)</b> output voltage step time, (100 % load) time, (10 % load)	7.5 $\rightarrow$ 0 V 0.2 ms 1 ms	16 $\rightarrow$ 0 V 0.24 ms 1.95 ms	35 $\rightarrow$ 0 V 0.27 ms 3 ms	200 $\rightarrow$ 0 V 0.42 ms 4.6 ms
output voltage step time, (100 % load) time, (10 % load)	- - -	- - -	70 $\rightarrow$ 0 V 0.85 ms 9.5 ms	400 $\rightarrow$ 0 V 1.7 ms 20 ms
<b>Ripple</b> @full load (rms/pp) @full load (rms/pp)	20 / 80 mV	40 / 120 mV	35 V / 24 A 25 / 90 mV 70 V / 12 A 30 / 110 mV	200 V / 4 A 35 / 200 mV 400 V / 2 A 30 / 160 mV
<b>Output capacitance</b>	310 $\mu$ F	200 $\mu$ F	80 $\mu$ F	4 $\mu$ F

Notes: All specifications regarding programming speed are typical and measured on a resistive load.

	<b>SM 7.5-80</b>	<b>SM 18-50</b>	<b>SM 70-AR-24</b>	<b>SM 400-AR-4</b>
<b>Recovery time</b> recovery within di/dt of load step output voltage time, @ 50 - 100% load step max. deviation @ 230 V AC input voltage	50 mV 1.25 A/ $\mu$ s 7 V 100 $\mu$ s 160 mV	60 mV 0.9 A/ $\mu$ s 15 V 100 $\mu$ s 150 mV	35 V / 70 V 75 mV 0.4 / 0.2 A/ $\mu$ s 30 / 65 V 100 $\mu$ s 250 / 200 mV	200 V / 400 V 1 / 0.5 V 0.1 / 0.05 A/ $\mu$ s 185 / 370 V 100 $\mu$ s 2 / 1.5 V
<b>Output impedance</b> CV, 0-1 kHz CV, 1-100 kHz	< 1 m $\Omega$ < 30 m $\Omega$	< 2 m $\Omega$ < 30 m $\Omega$	< 7 m $\Omega$ < 35 m $\Omega$	< 0.18 $\Omega$ < 2 $\Omega$
<b>Pulsating load</b> max. tolerable AC component of load current f > 1 kHz f < 1 kHz	15 Arms 80 Apeak	15 Arms 50 Apeak	10 Arms 12 / 24 Apeak	0.4 Arms 2 / 4 Apeak

<b>Insulation</b> input / output creepage / clearance  input / case output / case	3750 Vrms (1 min.) 8 mm  2500 Vrms 600 V DC
<b>Safety</b>	EN 60950 / EN 61010
<b>EMC Power Supply Standard</b>	<b>EN 61204-3</b> , Emission: residential, <b>light</b> industrial environment (CISPR22-Class <b>B</b> ) Immunity: industrial environment
<b>Generic Emission Generic Immunity</b>	<b>EN 61000-6-3</b> , residential, <b>light</b> industrial environment (EN 55022 <b>B</b> ) <b>EN 61000-6-2</b> , industrial environment
<b>Operating Temperature at full load</b>	- 20 to + 50 °C derate output to 75% at 60 °C
<b>Humidity</b>	max. 95% RH, non condensing, up to 40 °C max. 75% RH, non condensing, up to 50 °C
<b>Storage temperature</b>	- 40 to + 85 °C
<b>Thermal protection</b>	Output shuts down in case of insufficient cooling
<b>MTBF</b>	500 000 hrs

<b>Hold-Up time</b> V <sub>out</sub> = 100%, P <sub>out</sub> ≤ 840 W V <sub>out</sub> = 85%, I <sub>out</sub> = 100% V <sub>out</sub> = 100%, I <sub>out</sub> = 50% @ 230 V AC input	16 ms 20 ms 36 ms  (time till DC-fail = 1)
<b>Turn on delay</b> after mains switch on	600 ms @ 230 V AC, 900 ms @ 115 V AC
<b>Inrush current</b>	24 A @ 115 V AC, 22 A @ 230 V AC

<b>Series operation</b> max. total voltage Master / Slave operation	600 V yes
<b>Parallel operation</b> max. total current Master / Slave operation	no limit max. 4 units (including master)
<b>Remote sensing</b> max. volt. drop per load lead	2 V
<b>Limits Voltage</b> adjust range <b>Current</b> adjust range	0 - 102% 0 - 102%
<b>Potentiometers &amp; Encoders</b> front panel control with knobs resolution  screwdriver adjustment digital encoders	standard 0.03 %  Option P001 (at front panel) Option P236
	<b>SM 7.5-80</b> <b>SM 18-50</b> <b>SM 70-AR-24</b> <b>SM 400-AR-4</b>
<b>Meters</b> scale voltage scale current accuracy read output read limit setting (d = digit)	3.5 digit 0 - 7.50 V 0 - 80.0 A 0.5% + 2 d 2% + 2 d
	3.5 digit 0 - 18.00 V 0 - 50.0 A 0.5% + 2 d 2% + 2 d
	3.5 digit 0 - 70.0 V 0 - 24.0 A 0.5% + 2 d 2% + 2 d
	3.5 digit 0 - 400 V 0 - 4.00 A 0.5% + 2 d 2% + 2 d

<b>Mounting</b>	Stacking of units allowed, air flow is from rear to the sides.
<b>Input Connector</b>	IEC320/C14, EN 60320/C14
<b>Output Terminals</b>	M5 bolts
<b>Programming connector</b>	15 pole D-connector at rear panel (FEMALE)
<b>Cooling</b> audio noise level  airflow	Low noise blower, fan speed adapts to temperature of internal heatsink. ca. 45 dBA at full load, 25 °C ambient temperature, 1 m distance ca. 50 dBA at full load, 50 °C ambient temperature, 1 m distance from rear to sides
<b>Enclosure</b> degree of protection	IP20
<b>Dimensions</b> behind front panel: h x w x d front panel: h x w	86 x 221 x 406 mm (feet removed) 88.1 x 222 mm (1/2 19", 2 U)
<b>Weight</b>	5.4 kg

**Digital Encoders**


**OPTION P236**

- CV and CC encoders with a very long life time and intelligent functions (e.g. Keylock).

**Screwdriver adjustment standard potentiometers**


**OPTION P001**

- CV and CC knobs are moved backwards to avoid accidental adjusting.

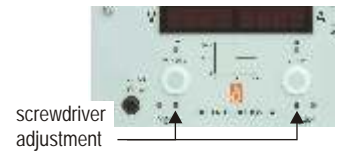


**Master / Slave operation**

- Parallel and Series operation with equal Current and Voltage sharing.
- This way two or more SM-units can be used together as one high power unit.
- Voltage and current of the units is controlled by the master (by potentiometers or by programming).
- Easy to connect in Master / Slave mode, using standard UTP-cables (RJ45).  
*Standard on all SM800 units, no special option required.*



**Battery Charging**

- The CV / CC regulated power supplies are ideal battery chargers. Once set at the correct output voltage, the battery will charge constantly without overcharging. This can be useful for **emergency power systems**.
- Use a circuit-breaker in series to protect the internal diode from reverse connection of the battery.
- The SM400-AR-4 needs an **external diode set** on the output as extra protection for the internal diode.
- *Ordering information for diode set: SM400-AR-4 OPTION P201*



*Download the special datasheet for more details from '[www.DeltaPowerSupplies.com](http://www.DeltaPowerSupplies.com)' (on the OPTIONS-page).*

**Increased max. output voltage/current**

**OPTION P069**

- The maximum output voltage or current can be increased by approximately 10%. Normally this results in a derating of the maximum ambient temperature or other parameters.
- Always add increased value for voltage or current in ordercode, for example **SM70-AR-24 P069 output 75 V**.
- Note: for the SM18-50 only the current can be increased by 10%, not the voltage.  
*For exact details consult the technical department, email '[Support@Delta-Elektronika.nl](mailto:Support@Delta-Elektronika.nl)'.*

**Enforced secondary insulation 1000 V**

**OPTION P089**


- The secondary insulation between output and ground is increased from standard 600 V to 1000 V .

**High Speed Programming**

- The speed is **10 - 20 times higher** because of the smaller output capacitors.
- Relatively low current overshoots (if any) in case of sudden voltage variations caused by the load, this is of great advantage for laser diode applications.

*Applications:*

- **Laser diode** power supply, continuous or pulsed.
- Test systems requiring a fast settling time to improve throughput of factory.
- A constant current source with a low parallel capacitance: plasma, load sensitive to current overshoots, etc.
- A constant current source on a load with **fast voltage variations**.
- *Ordering information:*




	SM 7.5-80	SM 18-50	SM 70-AR-24	SM 400-AR-4
Option	P250	P251	P252	P253

*Download the special datasheet for more details from '[www.DeltaPowerSupplies.com](http://www.DeltaPowerSupplies.com)'.*

**Power Sink for 2 quadrant operation**

- Can absorb continuous power of **140 W**.
- Maintains output voltage regardless output power is positive or negative (source & sink).
- Ideal solution for supplying **electric motors** with PWM-speed control.
- Fast down programming at no load conditions.
- *Ordering information:*

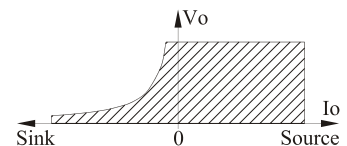

	SM 7.5-80	SM 18-50	SM 70-AR-24	SM 400-AR-4
Option	P245	P246	P247	P248

*Download the special datasheet for more details from '[www.DeltaPowerSupplies.com](http://www.DeltaPowerSupplies.com)'.*

**Built-in ISO AMP CARD for isolated analog programming**

**OPTION P249**

**Built-in RS232 Power Supply Controller**

**OPTION P254**

**Built-in IEEE488 Power Supply Controller**

**OPTION P255**

**Built-in Ethernet Power Supply Controller**

**OPTION P256**


**Built-in Profibus Power Supply Controller**


**OPTION P271**

**Built-in CANopen Power Supply Controller**

**OPTION P272**

*Note: there is only room for one of the interfaces in a unit (P249, P254, P255, P256, P271, P272)*





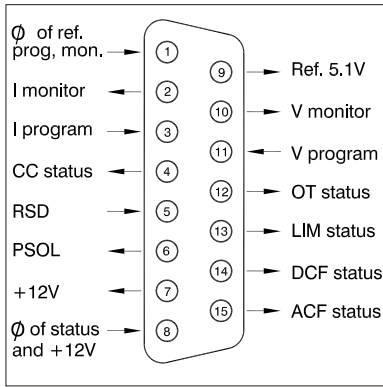


Connections programming connector

CV = Constant Voltage  
 CC = Constant Current

Specifications measured at  
 $t_{amb} = 25 \pm 5^\circ C$  and  $V_{in} = 230 V AC$ ,  
 50 Hz, unless otherwise noted.

The information in this document is  
 subject to change without notice

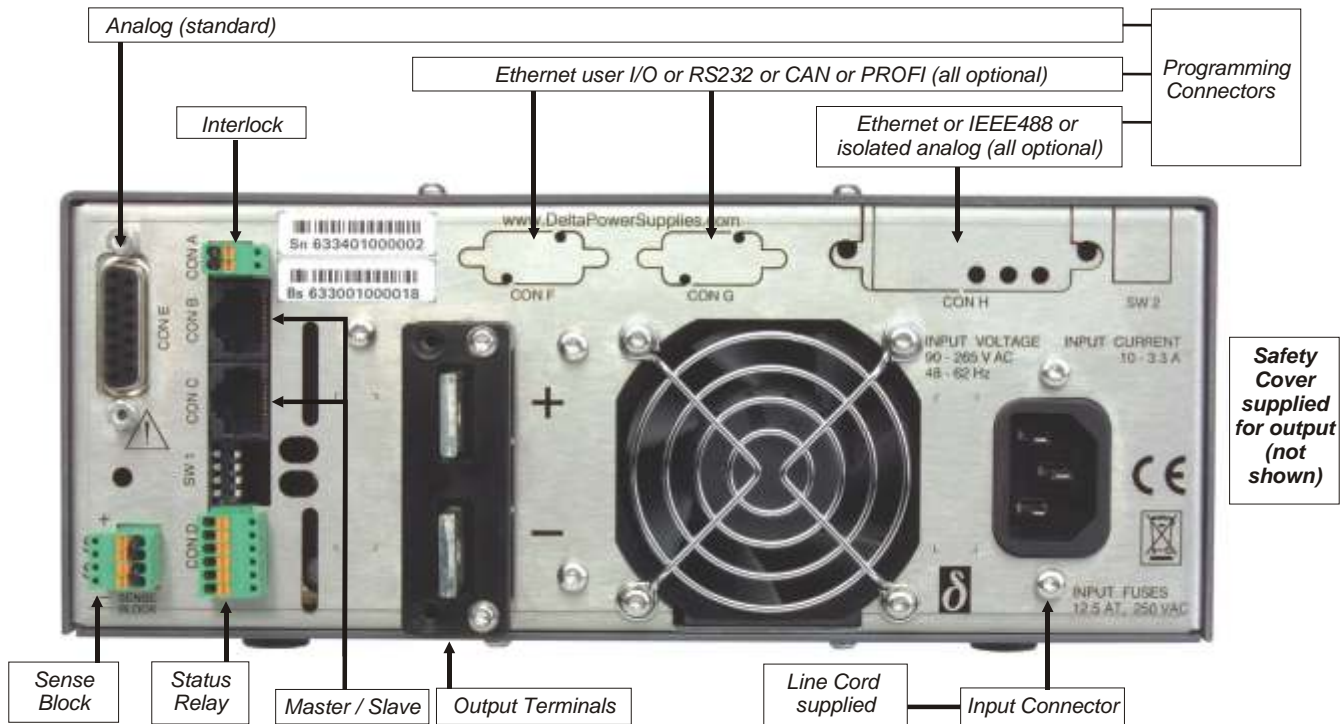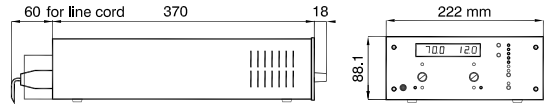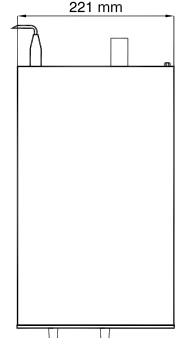

Front panel connection  
 SM18-50 Opt. 257 - SM70-AR-24 Opt. 258  
 SM400-AR-4 Opt. 259



19'' Rack Adapter RA19-2SM800

